

E22


Male threaded coupling in AISI 304 stainless steel - ND BSP from 1/4" to 4".



| DN GAS | 1/4" | 3/8" | 1/2" | 3/4" | 1" | 1" 1/4 | 1" 1/2 | 2" | 2" 1/2 | 3" | 4" |
|--------|------|------|------|------|----|--------|--------|----|--------|----|----|
| A | 18 | 20 | 25 | 30 | 35 | 40 | 40 | 43 | 45 | 45 | 50 |
| B | 17 | 14 | 20 | 20 | 20 | 20 | 20 | 25 | 25 | 25 | 25 |
| C | 40 | 50 | 60 | 70 | 80 | 100 | | | | | |

E23


Double-acting vent in Aisi 304 or Aisi 316 stainless steel operating in vaseline oilbath for the wine industry.

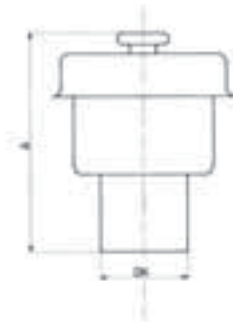

| | | | |
|----|-----|-----|-----|
| DN | 40 | 60 | 100 |
| A | 150 | 200 | 245 |

E24


Double-acting vent at 90° in Aisi 304 or Aisi 316 stainless steel operating in vaseline oilbath.

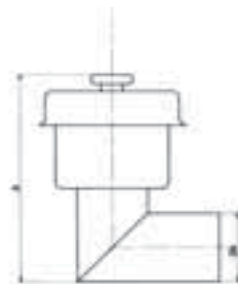

| | | | |
|----|-----|-----|-----|
| DN | 40 | 60 | 100 |
| A | 170 | 250 | 310 |


E25

Pressure compensating valve with threaded DIN female coupling in DN 50 stainless steel.
PRESSURE: + 0,002 Kp/cm²
DEPRESSION: - 0,002 Kp/cm²

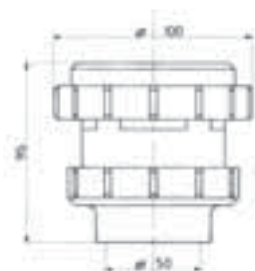

E26

2" Ø pressure/depression compensating valve in polyethylene.

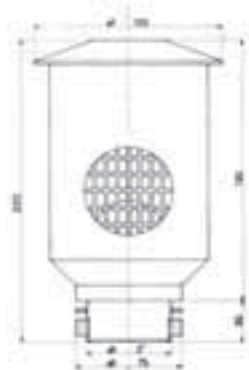

E27

1 1/4" Ø pressure/depression compensating valve in polyethylene.



E28

1 1/4" Ø pressure/depression compensating valve in polyethylene.



E29

Rubber vent.



E32

2" Diameter curved vent pipe in polyethylene.

