


Stainless Steel Piston Check Valve threaded BSP

FEATURES :

- 1) CHECK VALVES ARE USED FOR CONTROLLING FLOW IN ONE DIRECTION ONLY.
- 2) CHECK VALVES SHOULD NEVER BE USED AS CODE SAFETY RELIEF DEVICES.
- 3) HIGH PRESSURE CHECK VALVES FOR FLOW CONTROL OF LIQUIDS AND GASES.

NOTE :

- 1) END CONNECTIONS ISO 228/1 BSPP
- 2) 100% VALVE ARE FACTORY TESTED PRIOS TO DESPATCH.
- 3) CRACKING PRESSURE 0.27 BAR/4 PSI
- 4) MADE FROM 316 STAINLESS STEEL
- 5) SIZES 1/4" TO 1"

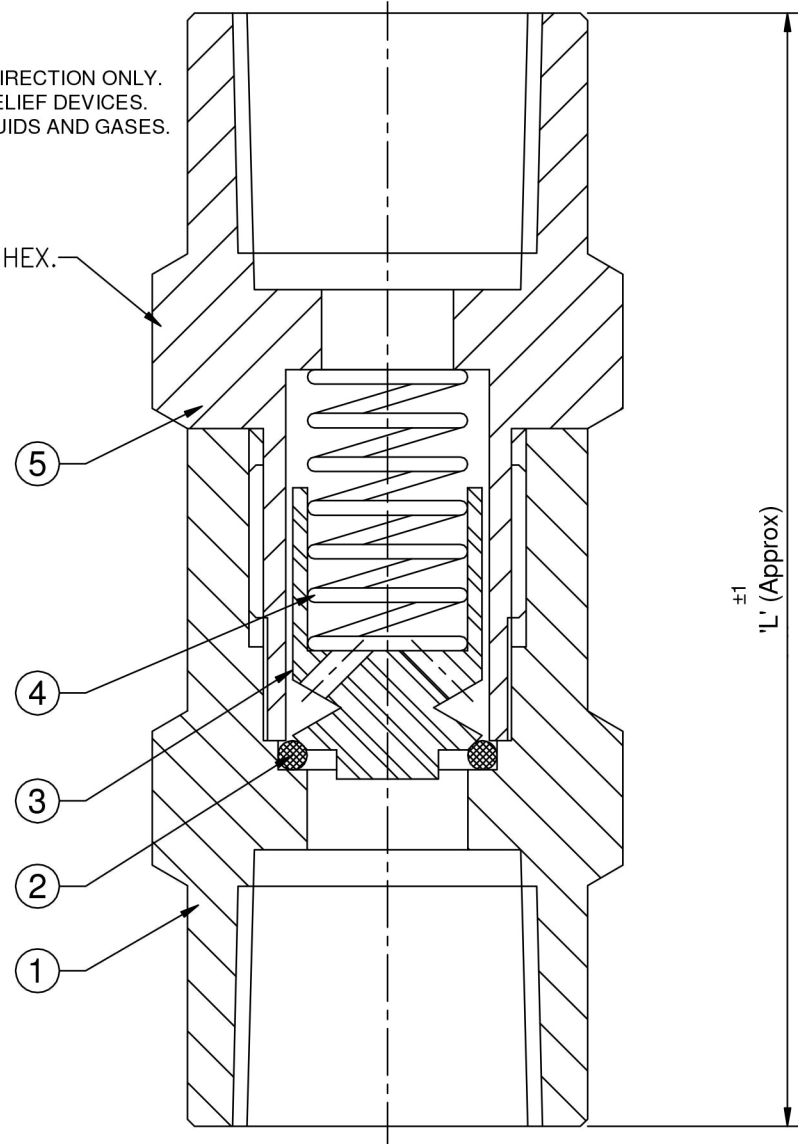

S.NO.	DESCRIPTION	QTY.	MATERIAL
1	VALVE BODY	1	SS 316 (AISI-316)
2	O-RING-1	1	VITON
3	POPPET	1	SS 316 (AISI-316)
4	SPRING	1	SS (AISI-410)
5	CONNECTOR	1	SS 316 (AISI-316)

SIZE BSPP	PART No	HEX	L	CRACKING PRESSURE (BAR)	Kg
1/4	PCV04	25.4	66.5	0.27	0.15
3/8	PCV06	25.4	66.5	0.27	0.52
1/2	PCV08	28.6	76.5	0.27	0.46
3/4	PCV12	32	76.3	0.27	2.22
1	PCV16	41	82.5	0.27	1.80