


### PUMP PROTECTION ELEMENTS - PERFORATED

	Stock Code	OD	A	T	H	P	OPEN AREA %
2" Pump Element - 1mm	2320220	46.5	130	0.9	1.0	2.0	22.7%
2" Pump Element - 1.5mm	2320420	46.5	130	0.9	1.5	3.0	22.7%
2" Pump Element - 2mm	2320221	46.5	130	0.9	2.0	4.0	22.7%
2" Pump Element - 3mm	2320620	46.5	130	0.9	3.0	5.0	32.6%
2" Pump Element - 4mm	2320222	46.5	130	0.9	4.0	6.0	40.3%
2" Pump Element - 5mm	2320635	46.5	130	0.9	5.0	8.0	35.4%
3" Pump Element - 1mm	2320230	72	205	0.9	1.0	2.0	22.7%
3" Pump Element - 1.5mm	2320430	72	205	0.9	1.0	3.0	22.7%
3" Pump Element - 2mm	2320235	72	205	0.9	2.0	4.0	22.7%
3" Pump Element - 3mm	2320630	72	205	0.9	3.0	5.0	32.6%
3" Pump Element - 5mm	2320636	72	205	0.9	5.0	8.0	40.3%
3" Pump Element - 10mm	2320637	72	205	0.9	10.0	15.0	35.4%
4" Pump Element - 1mm	2320240	97	238	0.9	1.0	2.0	22.7%
4" Pump Element - 1.5mm	2320435	97	238	0.9	1.5	3.0	22.7%
4" Pump Element - 2mm	2320631	97	238	0.9	2.0	4.0	22.7%
4" Pump Element - 3mm	2320623	97	238	0.9	3.0	5.0	32.6%
4" Pump Element - 10mm	2320638	97	238	0.9	10.0	15.0	35.4%
6" Pump Element - 1mm	2320250	149	323	0.9	1.0	2.0	22.7%
6" Pump Element - 1.5mm	2320440	149	323	0.9	1.5	3.0	22.7%
6" Pump Element - 3mm	2320634	149	323	0.9	3.0	5.0	32.6%

- MANUFACTURED FROM 316 STAINLESS STEEL
- ELEMENT ASSEMBLY CONSISTS OF:  
1 X PERFORATED ELEMENT, 1 X CLAMP BLANK
- ROUND PERFORATION:  
STAGGERED PITCH @ 60 DEGREES
- ALL ELEMENTS COMPLETE WITH MIN. 5MM BORDER.
- SUITABLE FOR CIP & SIP SYSTEMS.

- RIGID ELEMENTS SUITABLE FOR REVERSE FLUSHING.
- INNER & OUTER FINE MESH WRAP CAN BE SUPPLIED ON REQUEST.
- OTHER PERFORATION SIZES & PATTERNS AVAILABLE ON REQUEST.
- PERFORATED ELEMENTS ARE SUITABLE FOR FLOW IN TO OUT, AND FLOW OUT TO IN.

DUE TO CONTINUOUS DEVELOPMENT & INNOVATION, WE RESERVE THE RIGHT TO CHANGE THE DESIGN/DIMENSIONS WITHOUT PRIOR NOTICE

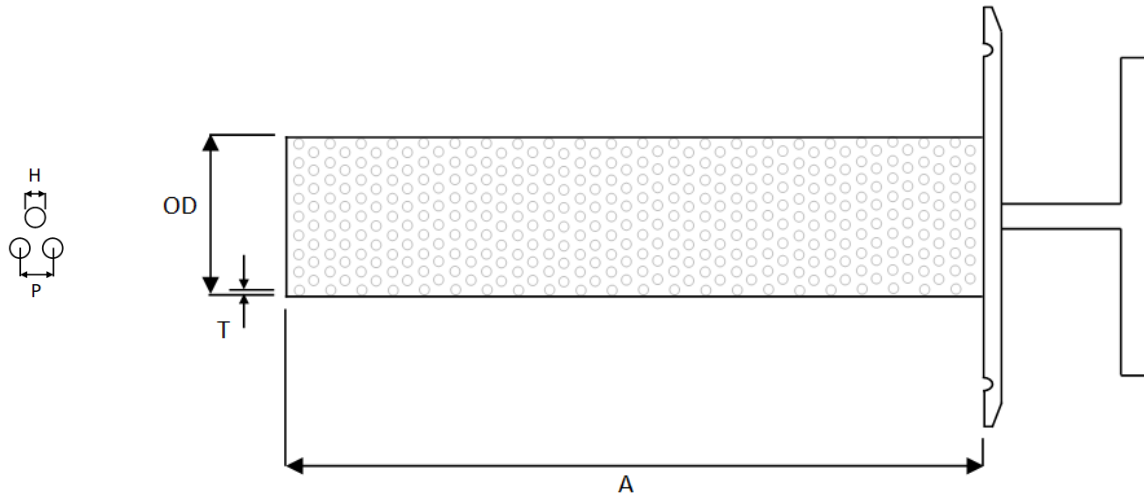

### PRODUCT ELEMENTS - PERFORATED

	Stock Code	OD	A	T	H	P	OPEN AREA %
2" Product Element - 1mm	2340440	46.5	400	0.9	1.0	2.0	22.7%
2" Product Element - 1.5mm	2340455	46.5	400	0.9	1.5	3.0	22.7%
2" Product Element - 2mm	2340484	46.5	400	0.9	2.0	4.0	
2" Product Element - 3mm	2340465	46.5	400	0.9	3.0	5.0	32.6%
2" Product Element - 5mm	2340490	46.5	400	0.9	5.0	8.0	35.4%
3" Product Element - 1mm	2340450	72	502	0.9	1.0	2.0	22.7%
3" Product Element - 1.5mm	2340460	72	502	0.9	1.5	3.0	22.7%
3" Product Element - 2mm	2340482	72	502	0.9	2.0	4.0	22.7%
3" Product Element - 3mm	2340470	72	502	0.9	3.0	5.0	32.6%
3" Product Element - 5mm	2340491	72	502	0.9	5.0	8.0	40.3%
3" Product Element - 10mm	2340480	72	502	0.9	10.0	15.0	35.4%
4" Product Element - 1mm	2340452	97	525	0.9	1.0	2.0	22.7%
4" Product Element - 1.5mm	2340462	97	525	0.9	1.5	3.0	22.7%
4" Product Element - 3mm	2340472	97	525	0.9	3.0	5.0	32.6%
4" Product Element - 5mm	2340492	97	525	0.9	5.0	8.0	40.3%
6" Product Element - 1mm	2340453	149	600	0.9	1.0	2.0	22.7%
6" Product Element - 1.5mm	2340463	149	600	0.9	1.5	3.0	22.7%
6" Product Element - 3mm	2340473	149	600	0.9	3.0	5.0	32.6%

- MANUFACTURED - FROM 316 STAINLESS STEEL
- ELEMENT ASSEMBLY CONSISTS OF:  
1 X PERFORATED ELEMENT, 1 X CLAMP BLANK
- ROUND PERFORATION:  
STAGGERED PITCH @ 60 DEGREES
- ALL ELEMENTS COMPLETE WITH MIN. 5MM BORDER.
- SUITABLE FOR CIP & SIP SYSTEMS.

- RIGID ELEMENTS SUITABLE FOR REVERSE FLUSHING.
- INNER & OUTER FINE MESH WRAP CAN BE SUPPLIED ON REQUEST.
- OTHER PERFORATION SIZES & PATTERNS AVAILABLE ON REQUEST.
- PERFORATED ELEMENTS ARE SUITABLE FOR FLOW IN TO OUT, AND FLOW OUT TO IN.

DUE TO CONTINUOUS DEVELOPMENT & INNOVATION, WE RESERVE THE RIGHT TO CHANGE THE DESIGN/DIMENSIONS WITHOUT PRIOR NOTICE